

# HYBRID COUPLER

The **Control Master®** Hybrid Coupler is installed in large scale Teleremote communication systems so as to combine both the data and video signal onto one receiving antenna.

This greatly reduces the amount of cables and components required in long drive clearances. The hybrid coupler saves costs on outlay and maintenance time.

The unit has three "N" type connectors and must be installed in the correct configuration.




Part No. 0942

Hybrid coupler

## SPECIFICATIONS

Bandwidth:	Full at 1.2:1 VSWR
Decoupled port:	3.0 dB
Isolation:	25 dB
Power rating:	300W
Connection:	"N" type fitting
Dimensions:	L-190mm W-64mm D-32mm
Weight:	1kg

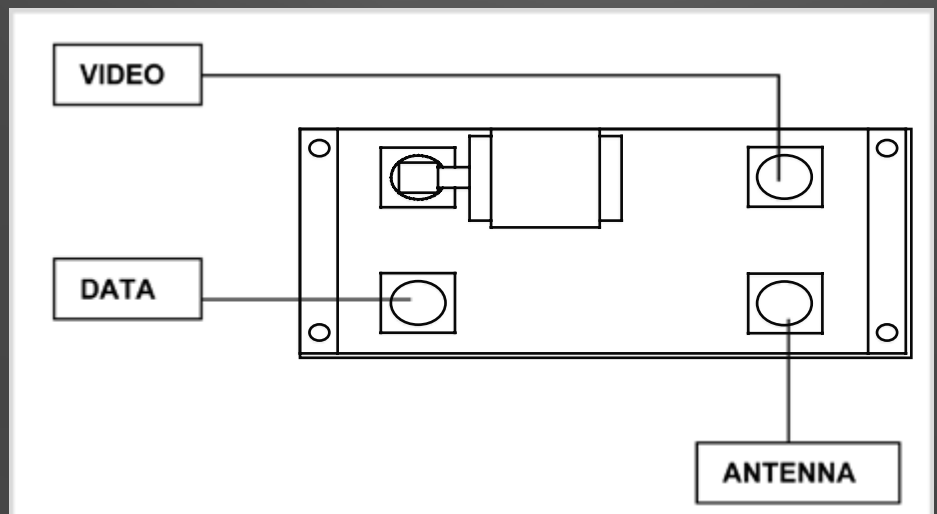

Manufactured by:



### PERTH

Unit 2-5/511 Abernethy Road  
Kewdale Western Australia 6105  
Ph: +61 8 9353 6577  
Fax: +61 8 9353 6578

### KALGOORLIE

24 Percy Road  
Kalgoorlie Western Australia 6430  
Ph: +61 8 9021 1600  
Fax: +61 8 9091 4927

### MT ISA

1A Ryan Road  
Mt Isa Queensland 4825  
Ph: +61 7 4749 0233  
Fax: +61 7 4749 0232

BRISBANE OFFICE: +61 7 3880 1231 MELBOURNE OFFICE: +61 3 9545 5859

[www.rct.net.au](http://www.rct.net.au)

[sales@rct.net.au](mailto:sales@rct.net.au)

Copyright© Remote Control Technologies Pty Ltd